




用途

具有良好的共、差模滤波性能
Good filtering performance of common-mode and differential-mode
被广泛应用于开关电源，UPS，变频逆变等电力电子设备。
Applications for switching-mode power-supply ups and other three-phase power equipments

规格表 Specification


型号 Model	端接方式 Connection		额定电流 Rated Current (A)	额定电压 Rated Voltage (V)	工作频率 Frequency Hz	试验电压(1分钟) Test Voltage (1min)		绝缘电阻 Insulation Resistance 线至地 L-G (500VDC)	温度范围 Temperature Range	泄漏电流 250VAC/50Hz mA Leakage Current	图号 Chart
	In	Out				线至地 L-G	线至线 L-L				
NF412C5/--			5	440/250VAC	50/60	1500VAC 2250VDC	1500VDC	>1500MΩ	-25℃~+85℃	<5	1
NF412C10/--			10	440/250VAC	50/60	1500VAC 2250VDC	1500VDC	>1500MΩ	-25℃~+85℃	<5	2
NF412C20/--			20	440/250VAC	50/60	1500VAC 2250VDC	1500VDC	>1500MΩ	-25℃~+85℃	<5	3
NF412C36/--			36	440/250VAC	50/60	1500VAC 2250VDC	1500VDC	>1500MΩ	-25℃~+85℃	<5	3
NF412C50/--			50	440/250VAC	50/60	1500VAC 2250VDC	1500VDC	>1500MΩ	-25℃~+85℃	<5	3
NF412C65/--			65	440/250VAC	50/60	1500VAC 2250VDC	1500VDC	>1500MΩ	-25℃~+85℃	<5	3
NF412C80/--			80	440/250VAC	50/60	1500VAC 2250VDC	1500VDC	>1500MΩ	-25℃~+85℃	<5	4
NF412C100/--			100	440/250VAC	50/60	1500VAC 2250VDC	1500VDC	>1500MΩ	-25℃~+85℃	<5	4
NF412C150/--			150	440/250VAC	50/60	1500VAC 2250VDC	1500VDC	>1500MΩ	-25℃~+85℃	<5	4
NF412C200/--			200	440/250VAC	50/60	1500VAC 2250VDC	1500VDC	>1500MΩ	-25℃~+85℃	<35	5
NF412C300/--			300	440/250VAC	50/60	1500VAC 2250VDC	1500VDC	>1500MΩ	-25℃~+85℃	<35	5
NF412C400/--			400	440/250VAC	50/60	1500VAC 2250VDC	1500VDC	>1500MΩ	-25℃~+85℃	<35	6
NF412C600/--			600	440/250VAC	50/60	1500VAC 2250VDC	1500VDC	>1500MΩ	-25℃~+85℃	<35	6

典型电路原理图 Typical Circuit Diagram

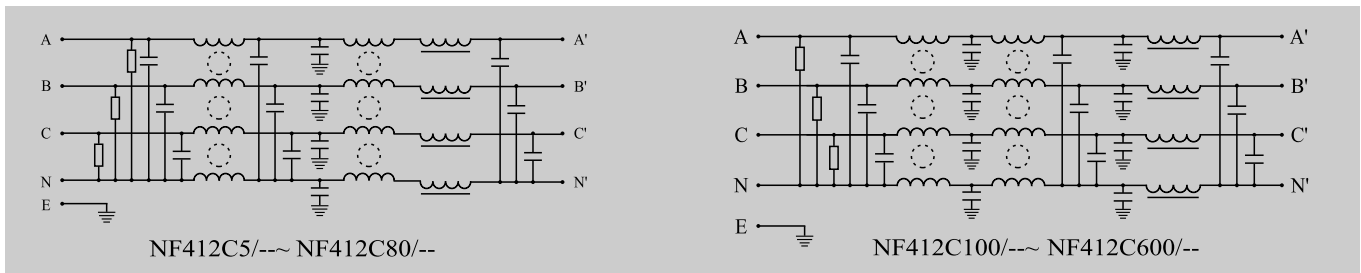

注：以上为部分典型产品型号，公司可据要求特制。

典型插入衰减: TYP, Insertion Loss: (IEC/CISPR NO.17 50 Ohm)

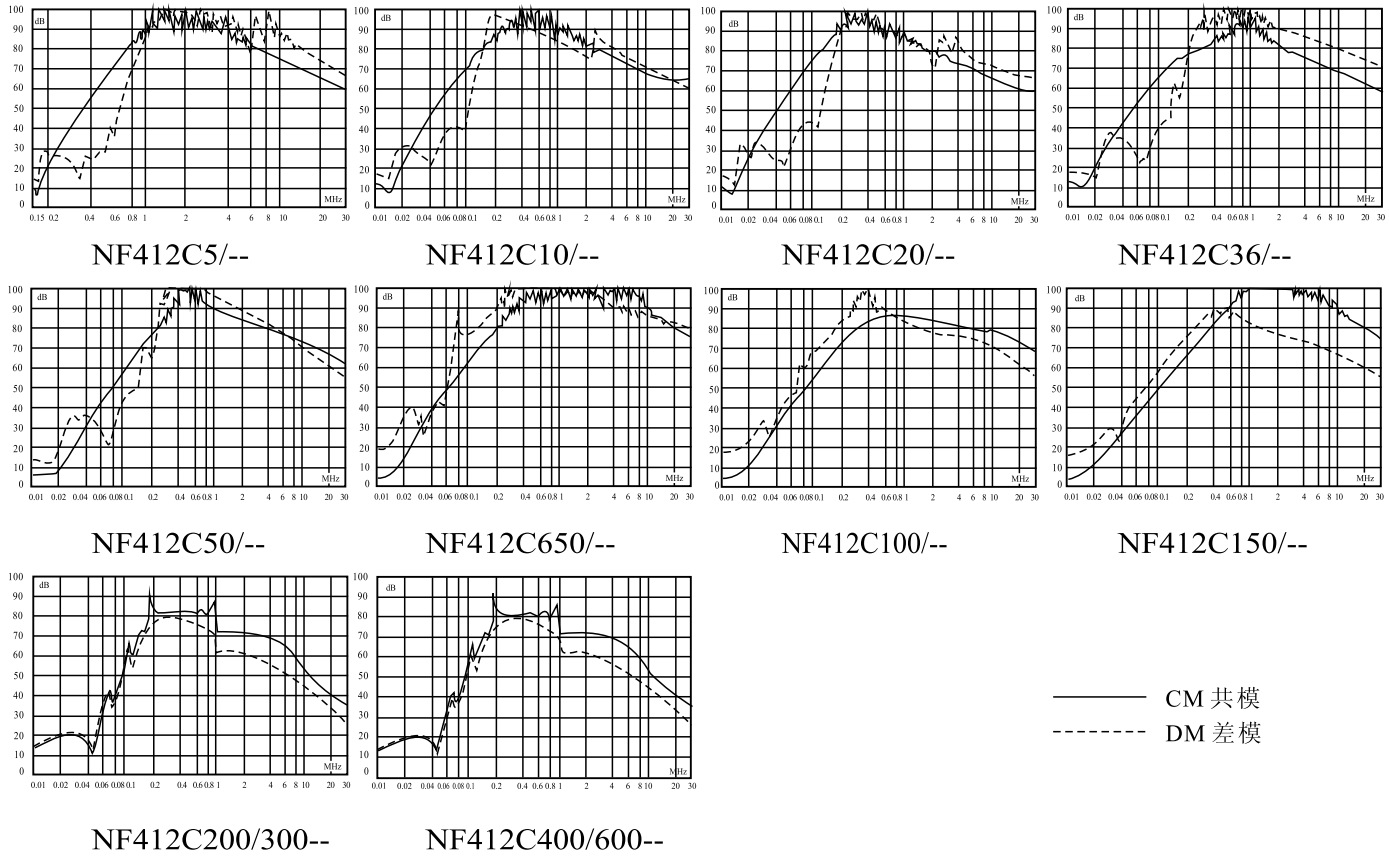

外型尺寸图 Outline Drawing & Dimensions (mm):

